


COORDENADAS U.T.M.	
X	496311.70
Y	4790927.80
Z	340.05

275.16g

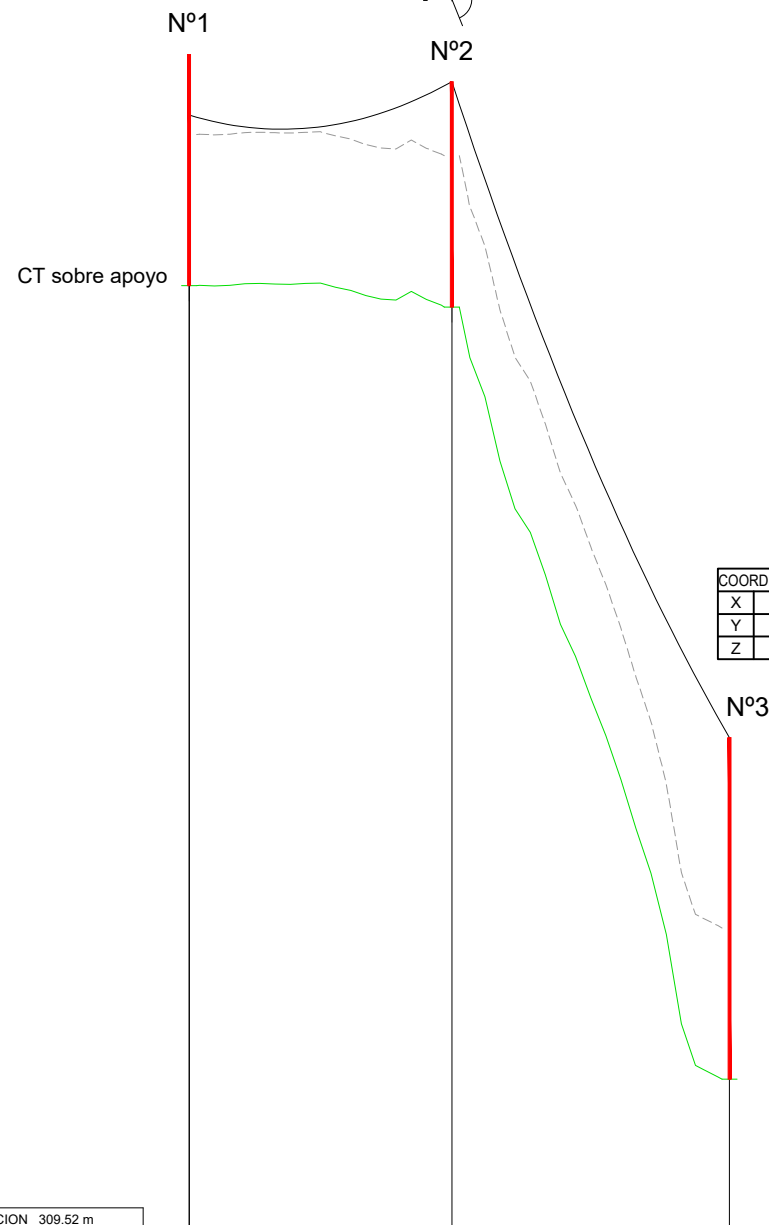

Vano	Conductor	Long. (m)	Desnl. (m)	V.Reg. (m)	0°C		5°C		10°C		15°C		20°C		25°C	
					Th(daN)	F(m)	Th(daN)	F(m)	Th(daN)	F(m)	Th(daN)	F(m)	Th(daN)	F(m)	Th(daN)	F(m)
1-2	3x50 Al/54.6 Alm	34,75	1,1	34,75	172	0,66	164,3	0,69	157,3	0,72	151	0,75	145,4	0,78	140,2	0,81
2-3	3x50 Al/54.6 Alm	36,75	-21,69	36,75	127,8	1,15	123,6	1,19	119,7	1,23	116,1	1,27	112,8	1,3	109,7	1,34

Vano	Conductor	Long. (m)	Desn. (m)	V.Reg. (m)	30°C		35°C		40°C		45°C		50°C	
					Th(daN)	F(m)	Th(daN)	F(m)	Th(daN)	F(m)	Th(daN)	F(m)	Th(daN)	F(m)
1-2	3x50 Al/54.6 Alm	34,75	1,1	34,75	135,6	0,84	131,3	0,86	127,3	0,89	123,7	0,92	120,3	0,94
2-3	3x50 Al/54.6 Alm	36,75	-21,69	36,75	106,9	1,38	104,2	1,41	101,8	1,45	99,4	1,48	97,3	1,51

COORDENADAS U.T.M.	
X	496320.41
Y	4790892.10
Z	314.52

400V S/C				
PLANO DE COMPARACION 309.52 m				
DISTANCIAS PARCIALES		34.75	36.75	
DISTANCIAS AL ORIGEN		0	34.75	71.49
COTAS DEL TERRENO		340.76	340.05	314.52
ZONA		A		
SERIE		1	2	
TIPO CONDUCTOR		3x50+1x54.6mm2 Al		
TENSADO		9,7 EDS%		
NUMERO	Nº1 (ACT)	Nº2	Nº3	
TIPO APOYO/ALTURA	HV-630-R9	HV-630-R9	HV-630-R13	
TOMA TIERRA				
ARMADO				
OBSERVACIONES				

PERFIL

$$H = 1/1.000$$
$$V = 1/250$$